



Tiger Combination Chain Block & Trolley



Spark resistant option



15t combination unit



10t combination unit



Main Features

- Range from 0.5t to 30.0t
- Ideal for locations where headroom is limited
- Geared and plain trolley versions available
- Twin bar or single bar trolley options
- Extended beam width available
- Operating temperature of -30°C to +50°C (temperature range of -50°C to +50°C available as an option)
- Can be chained to any height of lift to meet your exact requirements
- Chain carrier available
- Corrosion or Spark Resistant versions available

See individual technical sheets for TCB/SS12 chain blocks and TP/TG trolleys for more details.

Certification:

Each unit comes fully certified with a test certificate or an EC Declaration of Conformity stating compliance with the essential health and safety requirements of the Machinery Directive 2006/42/EC.






Technical Data - Plain Trolley Combination Units

	Product Code	Capacity (tonne)	D - Track width		Dimensions (mm)				Min. curve ratio (m)	Net Weight (kg) @ std HOL
			Range 1 (mm)	Range 2 (mm)	A	B	C	H		
Single Bar Trolleys	CCBTPS-0050	0.5	62-128	62-203	195	106	106	310	0.8	16.0
	CCBTPS-0100	1.0	62-128	62-203	213	113	113	350	1.0	19.5
	CCBTPS-0200	2.0	88-154	88-230	236	136	136	450	1.3	33.0
	CCBTPS-0300	3.0	88-153	88-230	270	146	146	530	1.5	48.5
Twin Bar Trolleys	CCBTPT-030T	3.0	88-153	88-230	320	142	142	435	1.5	45.5
	CCBTPT-0500	5.0	106-194	106-305	352	167	166	545	1.5	69.0
	CCBTPT-1000	10.0	150-320	N/A	460	255	255	730	2.7	185.0

Standard height of lift (HOL) of chain block - 3m. We can change this to suit your requirements.
 0.5t-2t twin bar available as special orders – minimum order 100 each size.

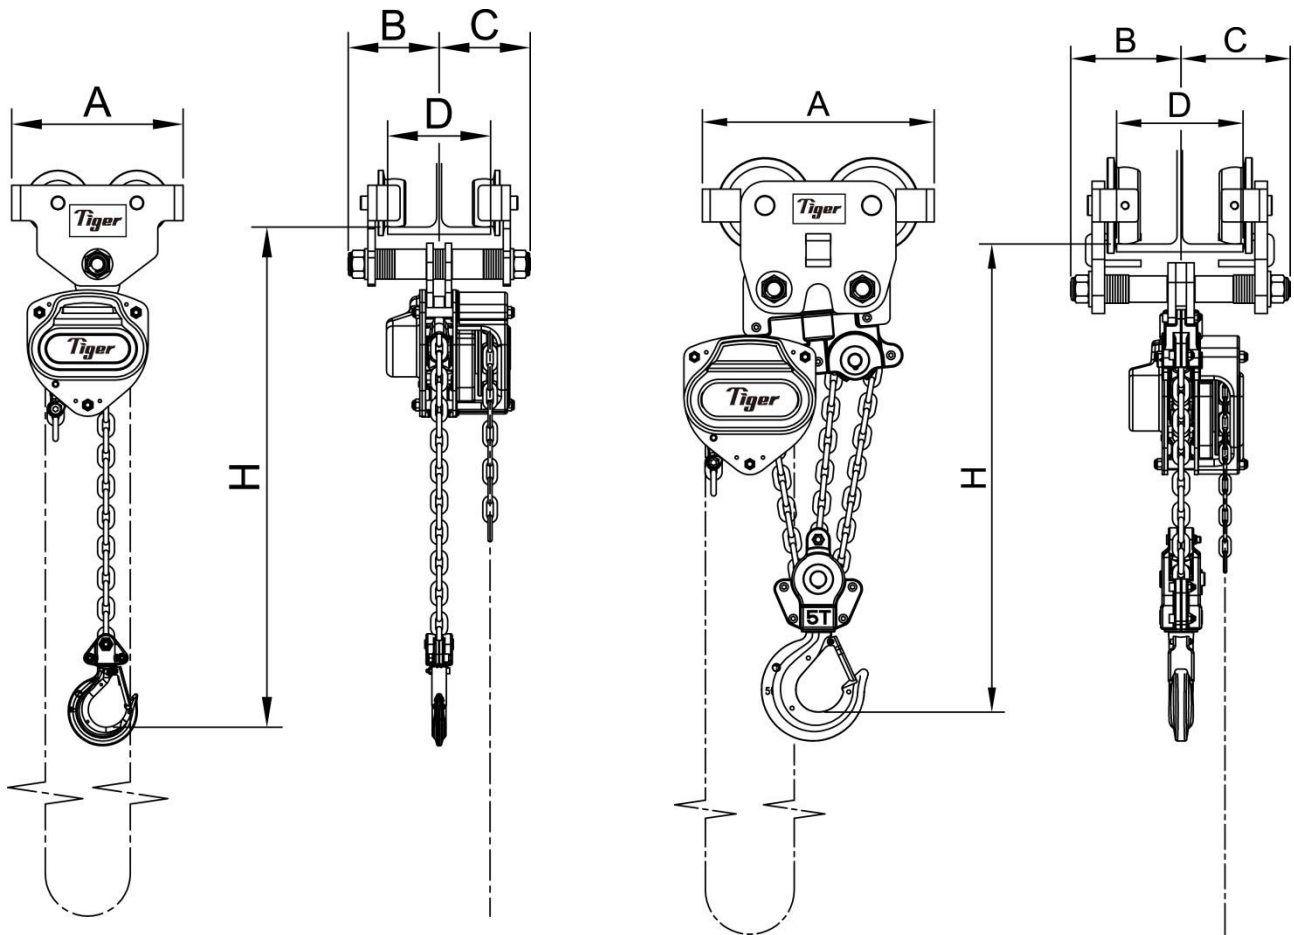

Single Bar

Twin Bar






Technical Data - Geared Trolley Combination Units

	Product Code	Capacity (tonne)	D - Track width		Dimensions (mm)				Min. curve ratio (m)	Net Weight (kg) @ std HOL
			Range 1 (mm)	Range 2 (mm)	A	B	C	H		
Single Bar Trolleys	CCBTGS-0050	0.5	62-128	62-203	195	165	106	310	0.8	20.0
	CCBTGS-0100	1.0	62-128	62-203	213	170	113	350	1.0	23.5
	CCBTGS-0200	2.0	88-154	88-230	236	182	136	450	1.3	37.5
	CCBTGS-0300	3.0	88-153	88-230	270	184	146	530	1.5	53.5
Twin Bar Trolleys	CCBTGT-030T	3.0	88-153	88-230	320	181	142	435	1.5	58.5
	CCBTGT-0500	5.0	106-194	106-305	352	202	166	545	1.5	74.5
	CCBTGT-1000	10.0	150-320	N/A	460	335	255	730	2.7	200.0
	CCBTGT-1500	15.0	150-320	N/A	930	335	255	880	6.0	420.0
	CCBTGT-2000	20.0	150-320	N/A	930	335	255	1000	6.0	460.0
	CCBTGT-3000	30.0	150-320	N/A	990	348	267	1145	6.0	640.0

Standard geared trolley hand chain length - 2.5m. We can change the length to suit your requirements.

Standard height of lift (HOL) of chain block - 3m. We can change this to suit your requirements.


0.5t-2t twin bar available as special orders – minimum order 100 each size.

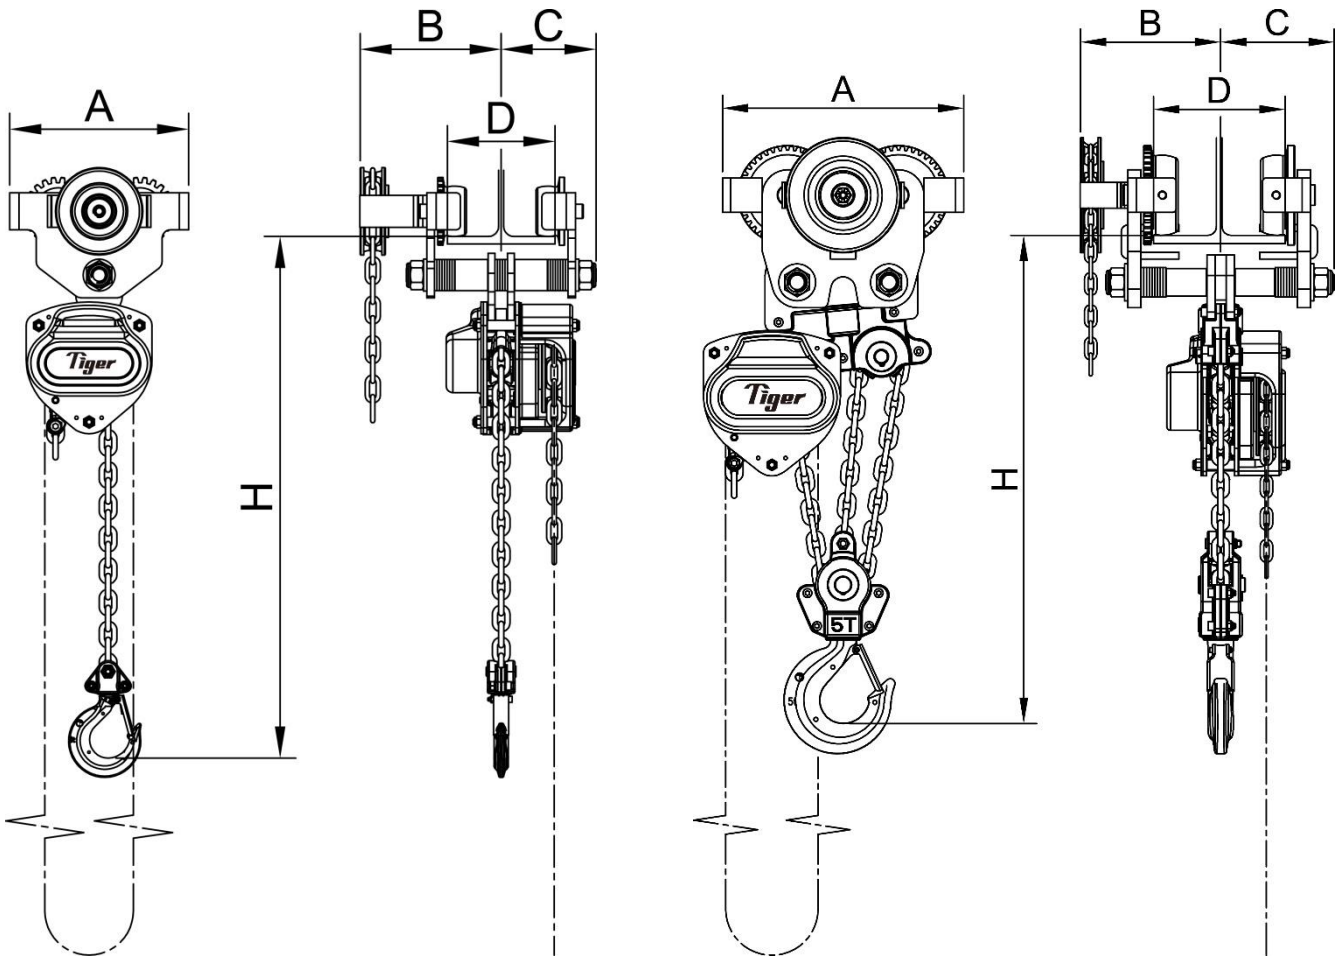


Single Bar

Twin Bar 3.0t – 10.0t



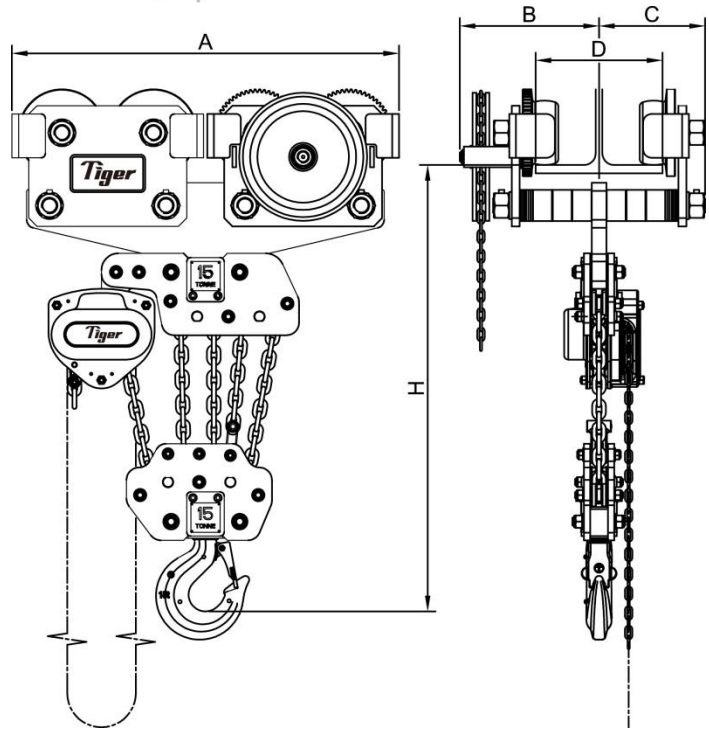

Twin Bar Trolley 15.0t – 20.0t

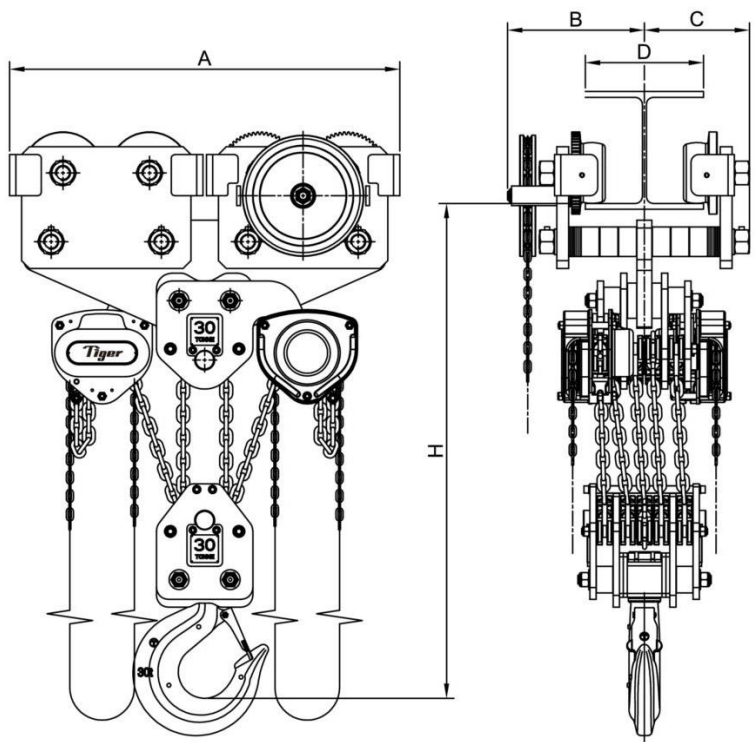

Twin Bar Trolley 30.0t

Due to our policy of continual product development, dimensions, weights and specifications may change without prior notice. Please check with your Tiger sales team when ordering.

